

Standard Features:

- **Variable Speed Control:**
Up to 30,000 sheets per hour.
- **Fold Types:** C, V, Z eccentric and custom folds.
- **Automatic Stop:** Machine will automatically stop feeding when a paper jam occurs.
- **5-Digit Counter:** Keeps an accurate count on all documents folded.
- **Bottom Sheet Feed:** Facilitates continuous operation.
- **Conveyor:** Unique photo eye to maintain sequential order of pieces.
- **Static Eliminator:** Built in static eliminator prevents static electricity
- **Stand:** Heavy duty construction



The high performance **AutoSeal[®] FD 2090** utilizes pressure seal technology for increased efficiency and ease of operation. A bottom feed air process allows for continuous loading and processing of documents at speeds up to 30,000 pieces per hour. The AutoSeal will process C,V, Z, eccentric and custom folds. These features make the FD 2090 the most powerful and efficient solution for automating and processing one-piece pressure seal mailers.

Distributed by **LASER-FORMS.COM**
100 Main St Ste 222, Dover NH 03820
www.laser-forms.com info@laser-forms.com

1-800-777-7359

Flexible

The FD 2090 handles a variety of documents up to 14" x 20" including checks, invoices, school reports, tax forms and appointment notices. Pressure seal mailers can be used for virtually any application that can be printed on one form.

Powerful

The FD 2090 processes forms at a rate of up to 30,000 sheets per hour and can hold up to 350 - 24# forms in the feed hopper. Combined with a duty cycle of up to 600 thousand forms per month the FD 2090 is the ultimate solution for streamlining high-volume paper processing.




Pressure Seal Solution

The AutoSeal FD 2090 combined with a high end simplex printer and pressure seal forms create a secure, cost effective and time saving paper processing solution.

Ease of Operation

The FD 2090 is a high-capacity unit designed for continuous operation. The bottom feed vacuum process and 4' high capacity out-feed conveyor allows for continuous loading and unloading without interruption. The fold plates are manually set to accommodate for a variety of forms. Fine tuning knobs enable the operator to get a precise fold every time.

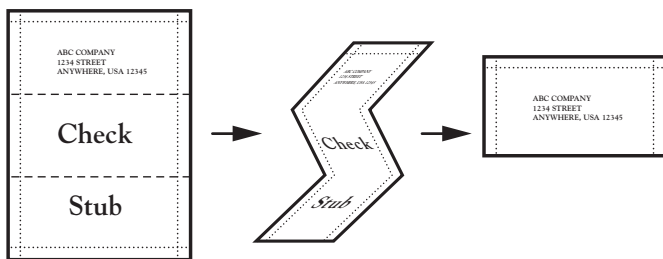

Standard Z-Fold Process

The FD 2090 is equipped with interlocks for fault detection, variable speed control and a five digit resettable counter for job auditing.

SPECIFICATIONS	Hopper Capacity:	350 Sheets 24#
	Variable Speed:	Up to 30,000 sheets per hour
	Paper Size:	4" - 14" width • 6" - 20" length
	Power:	120 Volts AC 50/60 Hz 30 Amp service is required
	Duty Cycle:	600,000 monthly
	Dimensions:	84"L x 20"W x 44"H
	Weight:	Approx. 550 lbs.
	Certifications:	UL and CUL Applied For